


BED TYPE MILLING MACHINE MTE MOD.K-2700

CNC UNIT HEIDENHAIN TNC 640 + HR510

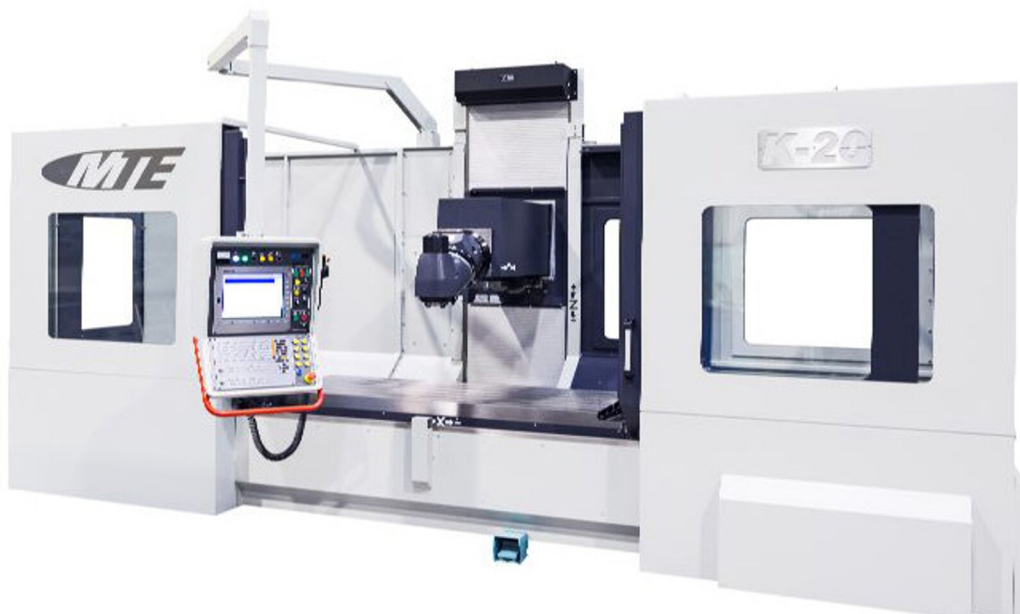

TECHNICAL CHARACTERISTICS

TABLE

• length	mm.	2700
• width	mm.	850
• number of T slots	n°	5
• width of T slots	mm.	22
• pitch of T slots	mm.	160
• max load permitted on the table	Kg.	6000

TRAVELS

• longitudinal travel	mm.	2500
• cross travel	mm.	1000
• vertical travel	mm.	1100

TECNOLOGY - MACHINE TOOLS - CUSTOMER CARE SERVICE

www.olidali.com - info@olidali.com

www.skio.net - info@skio.net

SPINDLE

• spindle taper DIN 69871 A	ISO	50
• spindle speed	rpm	40-4000
• spindle speed opt.	rpm	40-6000
• numero gamme di velocità	n°	2
• spindle motor	KW	24
• max torque	Nm	1020

FEEDS

• rapid feed	mm/min	15000
• working feed	mm/min	0-12000
• motor power X axis	Nm	28
• motor power Y axis	Nm	28
• motor power Z axis	Nm	28
• diameter x pitch X axis	mm.	63x12
• diameter x pitch Y axis	mm.	50x12
• diameter x pitch Z axis	mm.	50x12
• thrust axis X	N	17000
• thrust axis Y	N	33500
• thrust axis Z	N	33500

GENERAL DATA

• floor space	mm.	7350x4200
• height machine	mm.	2850
• approx weight	Kg.	15000

STANDARD ACCESSORIES

- Splash guard CE Norm
- Manual milling head with hydraulic clamping tool
- Coolant system
- Thermosond to avoid elongation of the Ram
- Rigid tapping with spindle orientation
- Operator and maintenance manuals
- CNC manuals